


TYPE H - HEAD PRESS FIT BUSHINGS

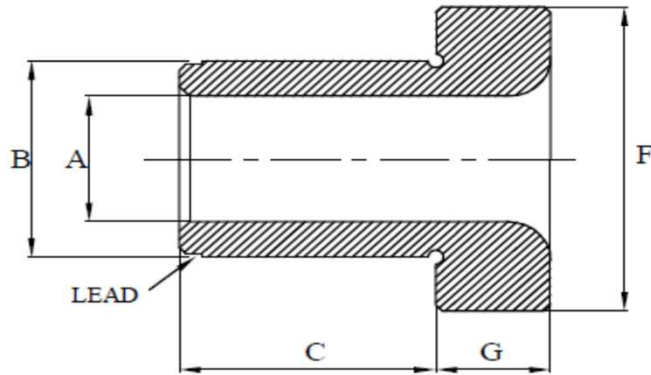

BORE SIZE RANGE	Outer Diameter B		LENGTH UNDER HEAD , CODE NUMBER AND PRICE IN US \$												HEAD			
	Size	Tolerance	Prefix	C												DIA	THK	
A	Size	Tolerance	Prefix	1/4	5/16	3/8	1/2	3/4	1	1-3/8	1-3/4	2-1/8	2-1/2	3	F	G		
0.0590 0.0625	5/32	0.1578 0.1575	H	10-4	10-5	10-6	10-8+	10-12+								1/4	3/32	
0.0473 0.0625	13/64	0.2046 0.2043	H	13-4	13-5	13-6	13-8	13-12+	13-16+								19/64	3/32
0.0635 0.0995	13/64	0.2046 0.2043	H	13-4	13-5	13-6	13-8+	13-12+	13-16 +	13-22+						19/64	3/32	
0.0980 0.1299	1/4	0.2516 0.2513	H	16-4	16-5	16-6	16-8	16-12	16-16+	16-22+	16-28+					23/64	3/32	
0.1300 0.1406	1/4	0.2516 0.2513	H	16-4	16-5	16-6	16-8	16-12	16-16+	16-22+	16-28+					23/64	3/32	
0.1250 0.1935	5/16	0.3141 0.3138	H	20-4	20-5	20-6	20-8	20-12	20-16+	20-22+	20-28+					27/64	1/8	
0.1875 0.2570	13/32	0.4078 0.4075	H	26-4	26-5	26-6	26-8	26-12	26-16+	26-22+	26-28+					1/2	5/32	
0.1875 0.3160	1/2	0.5017 0.5014	H	32-4	32-5	32-6	32-8	32-12	32-16	32-22+	32-28+					39/64	7/32	
0.3125 0.4375	5/8	0.6267 0.6264	H	40-4	40-5	40-6	40-8	40-12	40-16	40-22	40-28	40-34	40-40				51/64	7/32
0.3125 0.5312	3/4	0.7518 0.7515	H	48-4	48-5	48-6	48-8	48-12	48-16	48-22	48-28	48-34	48-40				59/64	7/32
0.5000 0.6562	7/8	0.8768 0.8765	H	56-5		56-6	56-8	56-12	56-16	56-22	56-28	56-34	56-40	56-48	1- 7/64	1/4		
0.5000 0.7656	1	1.0018 1.0015	H				64-8	64-12	64-16	64-22	64-28	64-34	64-40	64-48	1- 15/64	5/16		
0.6250 1.0312	1-3/8	1.3772 1.3768	H				88-8	88-12	88-16	88-22	88-28	88-34	88-40	88-48	1- 39/64	3/8		
1.0000 1.3906	1-3/4	1.7523 1.7519	H					112-12	112-16	112-22	112-28	112-34	112-40	112-48	1- 63/64	3/8		
1.3750 1.7656	2-1/4	2.2525 2.2521	H						144-16	144-22	144-28	144-34	144-40	144-48	2- 31/64	3/8		

+ bore adequately relieved as per chart