


ANSI STANDARD

Jan.1, 2019

TYPE P - HEADLESS PRESS FIT BUSHINGS

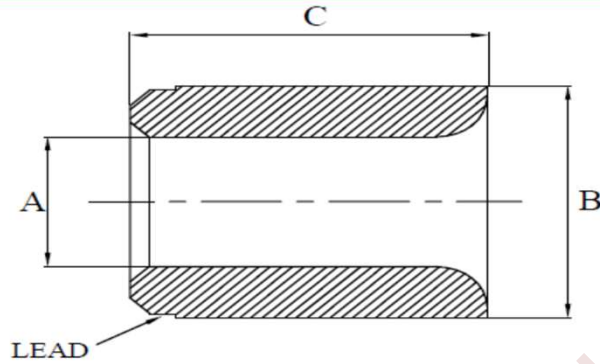

BORE SIZE RANGE	Outer Diameter B		Prefix	BUSHING LENGTH, CODE NUMBER AND PRICE IN US \$										
	Size	Tolerance		C										
A				1/4	5/16	3/8	1/2	3/4	1	1-3/8	1-3/4	2-1/8	2-1/2	3
0.0590	5/32	0.1578	P	10-4	10-5	10-6	10-8	10-12+						
0.0625		0.1575												
0.0473	13/64	0.2046	P	13-4	13-5	13-6	13-8	13-12+	13-16+					
0.0625		0.2043												
0.0635	13/64	0.2046	P	13-4	13-5	13-6	13-8	13-12+	13-16+	13-22+				
0.0995		0.2043												
0.0980	1/4	0.2516	P	16-4	16-5	16-6	16-8	16-12	16-16+	16-22+	16-28+			
0.1299		0.2513												
0.1300	1/4	0.2516	P	16-4	16-5	16-6	16-8	16-12	16-16+	16-22+	16-28+			
0.1406		0.2513												
0.1250	5/16	0.3141	P	20-4	20-5	20-6	20-8	20-12	20-16	20-22+	20-28+			
0.1935		0.3138												
0.1875	13/32	0.4078	P	26-4	26-5	26-6	26-8	26-12	26-16	26-22+	26-28+			
0.2570		0.4075												
0.1875	1/2	0.5017	P	32-4	32-5	32-6	32-8	32-12	32-16	32-22+	32-28+			
0.3160		0.5014												
0.3125	5/8	0.6267	P	40-4	40-5	40-6	40-8	40-12	40-16	40-22	40-28	40-34	40-40	
0.4375		0.6264												
0.3125	3/4	0.7518	P	48-4	48-5	48-6	48-8	48-12	48-16	48-22	48-28	48-34	48-40	
0.5312		0.7515												
0.5000	7/8	0.8768	P		56-5	56-6	56-8	56-12	56-16	56-22	56-28	56-34	56-40	56-48
0.6562		0.8765												
0.5000	1	1.0018	P				64-8	64-12	64-16	64-22	64-28	64-34	64-40	64-48
0.7656		1.0015												
0.6250	1-3/8	1.3772	P				88-8	88-12	88-16	88-22	88-28	88-34	88-40	88-48
1.0312		1.3768												
1.0000	1-3/4	1.7523	P					112-12	112-16	112-22	112-28	112-34	112-40	112-48
1.3906		1.7519												
1.3750	2-1/4	2.2525	P						144-16	144-22	144-28	144-34	144-40	144-48
1.7656		2.2521												
1.5000	2-3/4	2.7526	P						176-16	176-22	176-28	176-34	176-40	176-48
2. 3750		2.7522												

+ bore adequately relieved as per chart