


TYPE SF - SLIP FIXED RENEWABLE BUSHINGS

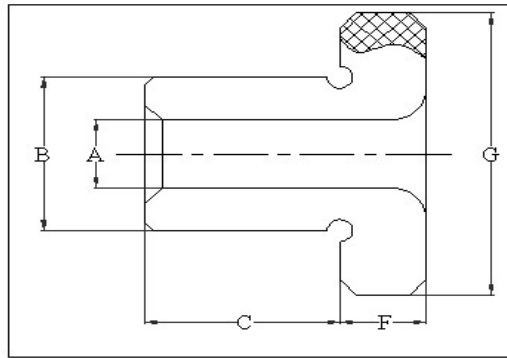

BORE SIZE RANGE	Outer Diameter		LENGTH UNDER HEAD, CODE NUMBER AND PRICE IN US \$												HEAD	
	B		Prefix	C											DIA	THK
A	Size	Tolerance		1/4	5/16	3/8	1/2	3/4	1	1-3/8	1-3/4	2-1/8	2-1/2	3	G	F
0.0590	3/16	0.1875	SF	12-4	12-5	12-6	12-8+	12-12+							5/16	3/16
0.0625		0.1873														
0.0590	5/16	0.3125	SF		20-5	20-6	20-8+	20-12+	20-16+						35/64	1/4
0.0890		0.3123														
0.0935	5/16	0.3125	SF		20-5	20-6	20-8	20-12	20-16+	20-22+					35/64	1/4
0.1299		0.3123														
0.1300	5/16	0.3125	SF		20-5	20-6	20-8	20-12	20-16+	20-22+					35/64	1/4
0.1935		0.3123														
0.1405	1/2	0.5000	SF		32-5	32-6	32-8	32-12	32-16+	32-22+	32-28+	32-34+			51/64	1/4
0.3437		0.4998														
0.2812	3/4	0.7500	SF				48-8	48-12	48-16	48-22	48-28	48-34	48-40+	48-48+	1 -	1/4
0.5625		0.7498													3/64	
0.4687	1	1.0000	SF				64-8	64-12	64-16	64-22	64-28	64-34	64-40	64-48	1 -	3/8
0.7812		0.9998													27/64	
0.7187	1-3/8	1.3750	SF				88-12	88-16	88-22	88-28	88-34	88-40	88-48		1 -	3/8
1.0625		1.3747													51/64	
0.9687	1-3/4	1.7500	SF				112-12	112-16	112-22	112-28	112-34	112-40	112-48		2 -	3/8
1.4062		1.7497													19/64	
1.3437	2-1/4	2.2500	SF				144-12	144-16	144-22	144-28	144-34	144-40	144-48		2 -	3/8
1.8750		2.2496													51/64	

+ bore adequately relieved as per chart